

SUB CI4-5 MKII SUBWOOFER

The Artcoustic Sub Ci4-5 MKII features four 5¼-inch long-throw woofers, paired with Artcoustic's in-house designed 1st order high-bandwidth sealed cabinet technology. This combination ensures precise low-frequency reproduction, high power handling, and exceptionally low distortion.

The Sub Ci4-5 MKII is perfect for installations where space and aesthetics are key. It can be mounted on construction beams, positioned low along the floor line, or discreetly placed under furniture such as sofas. An optional oversized baffle allows for seamless in-wall integration, blending effortlessly into any interior.



Operating Range: 40 Hz (-3 dB) to 400 Hz

Sensitivity: 90 dB

Maximum Power Handling 2 hours of 6 dB crest factor pink noise, 200 Watt RMS (AES Standard)

Impedance: 8 ohms nominal

Average Peak SPL: 110 dB

Weight: 10 kg


Dimensions (without baffle): H: 145 W: 1000 D: 99 mm

Dimensions (with baffle): H: 185 W: 1020 D: 111 mm

Cabinet: Indoor Black SL, White SL, Optional RAL and NCS


SCHEMATICS

dimensions are in mm

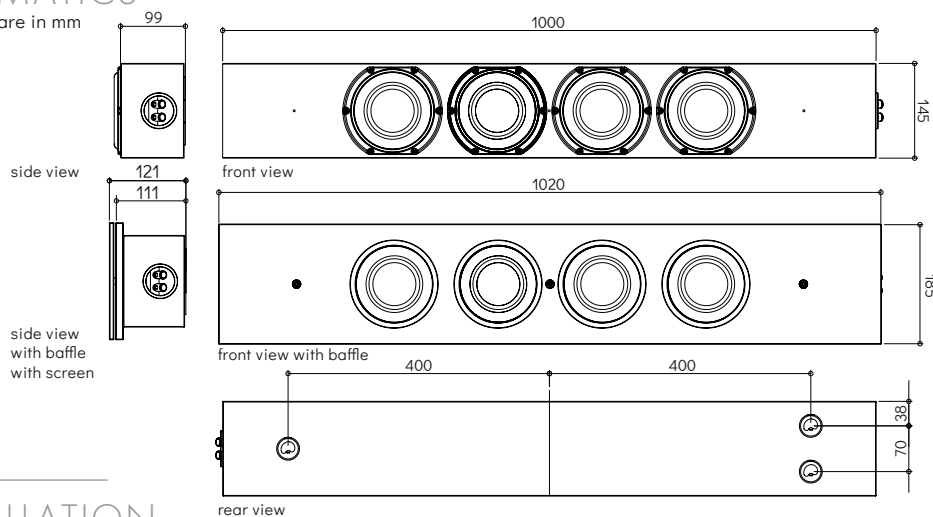


INSTALLATION

1

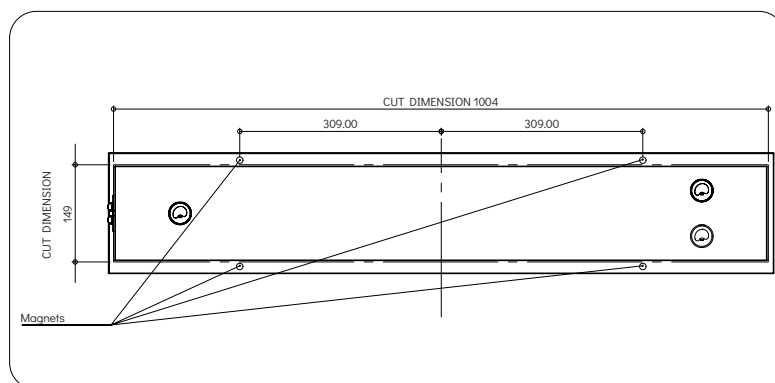

Cut the hole in the wall according to the template, carefully mark the wall cut out and the fitting bracket position. For horizontal studs, keep a minimum distance of 30mm.

2

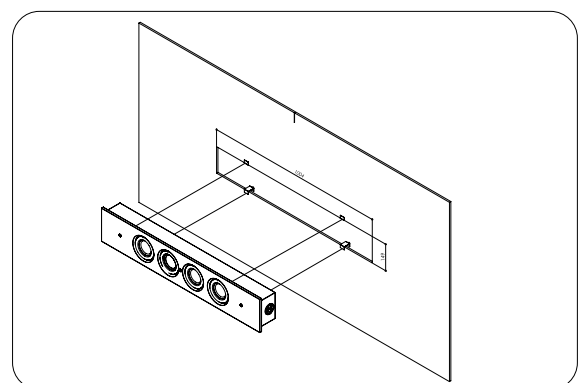

Fit Ci4-5 Subwoofer MKII in the cutout until magnets have contact with the four fixing brackets